

Manual Callpoint SSM500DKM


The manual addressable Callpoint is designed to operate in the Total Walther Loop-system.

Description

Aluminium die cast housing, according DIN 14655 Form G, for surface mounting. Door opens to the right. Address setting by two codewheels. Optical Alarmsignal by LED. The front label can be changed.

Specifications


Operating Voltage:	15 V ... 30 V DC
Standby Current:	0,4 mA
Alarm Current (LED on):	8 mA at 24 V
Cable Size:	max. 2,5 mm ²
Cable Gland:	2 x PG11
Type of Protection:	IP 44
Size	height: 125 mm width: 125 mm depth: 34 mm
Operating Temperature Range:	-10°C ... +50°C
Material:	Aluminium
Weight:	450 g
VdS-Approval:	G 296020

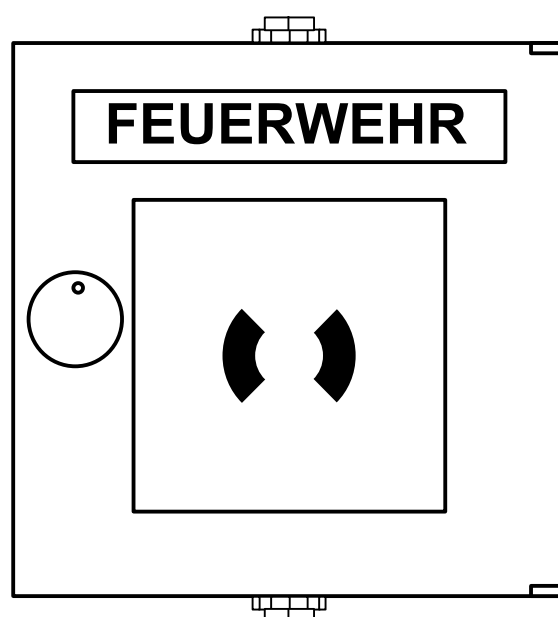

Ordering Notes


Type	Label	Order No.:
SSM500D M, red	Feuerwehr	0 246 911 6
SSM500D M , yellow	L schanlage	0 246 913 6
ey (to be ordered separately)		0 245 506 6
Spare glas 80 x 80 x 0,9	Red mar	0 245 508 6
Spare glas 80 x 80 x 0,9	ellow mar	0 245 509 6

Electrical Wiring

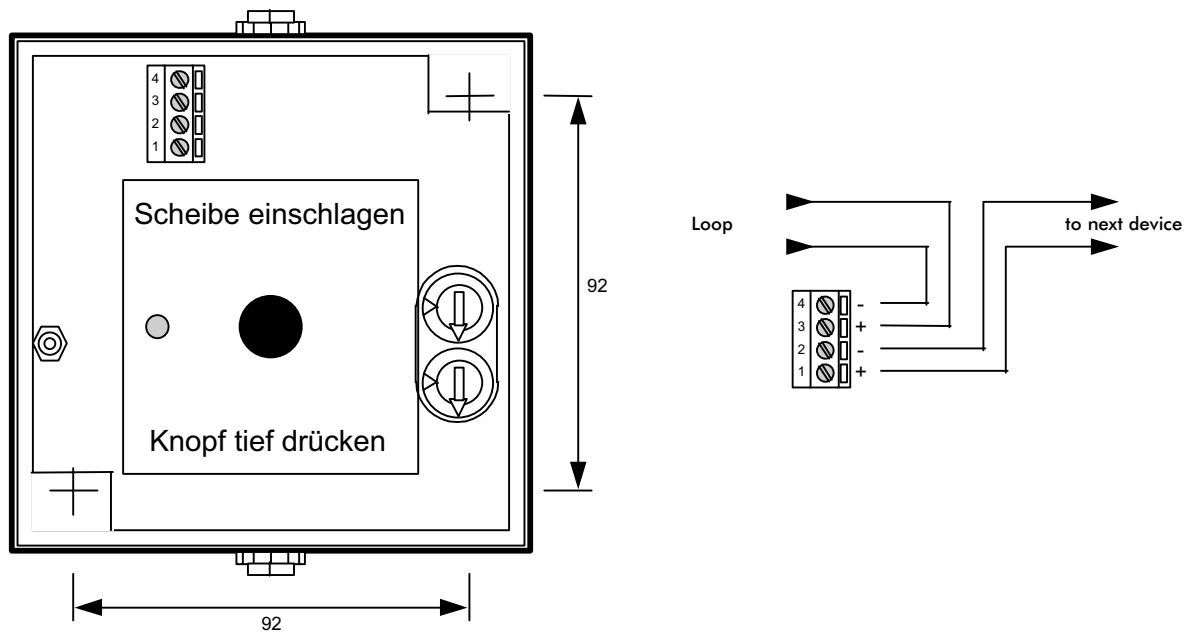

Accessories

A weather protection cover is needed for outdoor use.

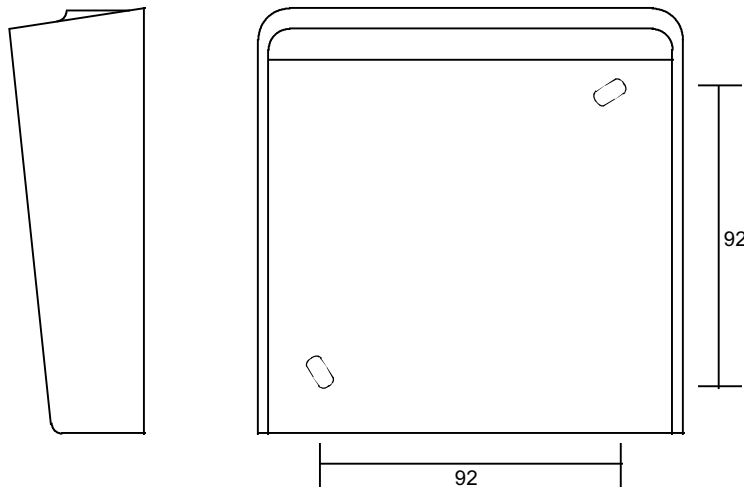

Delivery includes:

- 1 cable gland PG13,5, DIN 46320
- 1 cable gland PG11, DIN 46320
- 1 end cap PG13,5, DIN 46320
- 1 adapter PG11 x PG13,5
- 1 gas et ring for PG13,5

Order No. - Weather protection cover, red 0 246 909 6
 - Weather protection cover, yellow 0 246 910 6