

FIG. 1


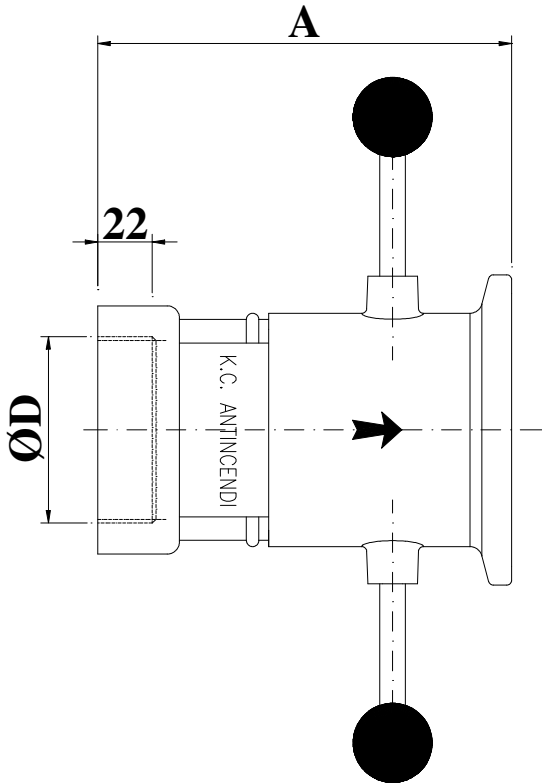


FIG. 2

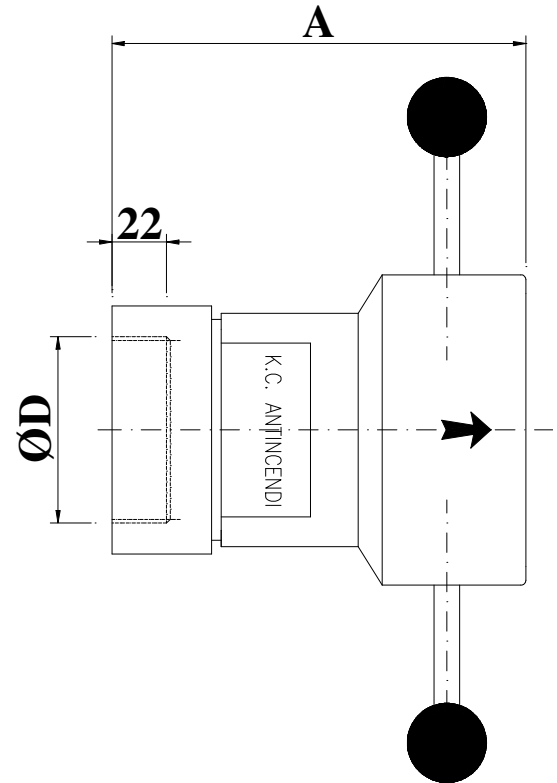

Le misure sono in mm
Dimensions are in mm

NOTE:

- **Curve caratteristiche a pag. 85-86**

NOTES:

- **Performance diagrams are shown on pages 85-86**

MODELLO <i>MODEL</i>	FIG. <i>FIG.</i>	A mm	øD GAS BSP	PORTATA <i>FLOW RATE</i> ⁽¹⁾ l/min.-7 bar	MATERIALE <i>MATERIAL</i>	PESO <i>WEIGHT</i> Kg
FX-25/AL	1	167	2½" ÷ 3"	1500-2000-2500	alluminio / <i>aluminium</i>	2.5
FX-25/OT	1	167	2½" ÷ 3"	1500-2000-2500	ottone / <i>brass</i>	6.5
FX-30/X	2	165	2½" ÷ 3"	1500-2000-2500-3000	acciaio inox AISI 316/ <i>stainless steel AISI 316</i>	8
FX-60/X	2	200	3" - 4"	3000-4000-5000-6000	acciaio inox AISI 316/ <i>stainless steel AISI 316</i>	10

⁽¹⁾ Dipende dal tipo di schiumogeno.

⁽¹⁾ *Depending on foam concentrate type.*